

# SMART Transmitter Power Supply

## KFD2-STC5-Ex1.H

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Input 2-wire and 3-wire SMART transmitters and 2-wire SMART current sources
- Output 0/4 mA ... 20 mA current sink/current source
- Terminals with test points
- High field voltage 17 V DC
- SIL 2 (SC 3) acc. to IEC/EN 61508




**SIL 2**



### Function

This isolated barrier is used for intrinsic safety applications. The device supplies 2-wire and 3-wire SMART transmitters, and can also be used with 2-wire SMART current sources. It transfers the analog input signal to the safe area as an isolated current value. Digital signals may be superimposed on the input signal in the hazardous or non-hazardous area and are transferred bi-directionally. The device provides a sink mode or a source mode output on the safe area terminals. The device has an internal resistor. Use this resistor if the HART communication resistance in the control circuit is too low. Test sockets for the connection of HART communicators are integrated into the terminals of the device.

### Connection

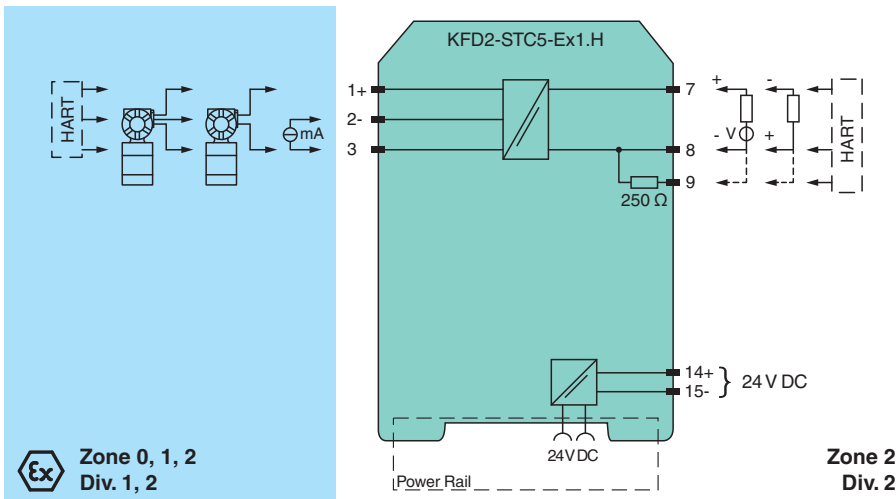

### Technical Data

#### General specifications

Signal type: Analog input

#### Functional safety related parameters

Safety Integrity Level (SIL): SIL 2  
 Systematic capability (SC): SC 3

#### Supply

Connection: Power Rail or terminals 14+, 15-  
 Rated voltage:  $U_r$  18 ... 30 V DC  
 Ripple: within the supply tolerance  
 Power dissipation:  $\leq 1$  W at maximum load

Release date: 2021-11-29 Date of issue: 2021-11-29 Filename: 239217\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
 www.pepperl-fuchs.com

USA: +1 330 486 0002  
 pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
 pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
 pa-info@sg.pepperl-fuchs.com



## Technical Data

Power consumption		≤ 1.6 W at maximum load
<b>Input</b>		
Connection side		field side
Connection		terminals 1+, 2-, 3
Input signal		0/4 ... 20 mA
Open circuit voltage/short-circuit current		terminals 1+, 3: 24 V / 25 mA
Input resistance		max. 265 Ω terminals 2-, 3 , max. 330 Ω terminals 1+, 3
Available voltage		≥ 17 V at 20 mA ; ≥ 21 V at 4 mA , terminals 1+, 3
<b>Output</b>		
Connection side		control side
Connection		terminals 7+, 8-, 9- (sink) terminals 7-, 8+, 9+ (source) see additional information
Load		0 ... 800 Ω
Output signal		0/4 ... 20 mA (overload > 25 mA)
Ripple		max. 50 μA <sub>rms</sub>
External supply (loop)		2 ... 30 V DC
<b>Transfer characteristics</b>		
Deviation		at 20 °C (68 °F), 0/4 ... 20 mA ≤ 10 μA incl. calibration, linearity, hysteresis, loads and fluctuations of supply voltage
Influence of ambient temperature		≤ 0.25 μA/K
Frequency range		field side into the control side: bandwidth with 0.5 V <sub>pp</sub> signal 0 ... 7.5 kHz (-3 dB) control side into the field side: bandwidth with 0.5 V <sub>pp</sub> signal 0.3 ... 7.5 kHz (-3 dB)
Settling time		200 μs
Rise time/fall time		100 μs
<b>Galvanic isolation</b>		
Output/power supply		functional insulation, rated insulation voltage 50 V AC
<b>Indicators/settings</b>		
Display elements		LED
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
<b>Conformity</b>		
Electromagnetic compatibility		NE 21:2012 EN 61326-3-2:2008
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1:2012
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F) extended ambient temperature range up to 70 °C (158 °F), refer to manual for necessary mounting conditions
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 200 g
Dimensions		20 x 124 x 115 mm (0.8 x 4.9 x 4.5 inch) (W x H x D) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate		CML 17 ATEX 2029X
Marking		⊕ II (1)G [Ex ia Ga] IIC ⊕ II (1)D [Ex ia Da] IIIC ⊕ I (M1) [Ex ia Ma] I
Input		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
Supply		
Maximum safe voltage	U <sub>m</sub>	250 V (Attention! The rated voltage can be lower.)

Release date: 2021-11-29 Date of issue: 2021-11-29 Filename: 239217\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

**PEPPERL+FUCHS**

## Technical Data

Equipment		terminals 1+, 3-
Voltage $U_o$		27.2 V
Current $I_o$		93 mA
Power $P_o$		633 mW
Internal capacitance $C_i$		12 nF
Internal inductance $L_i$		0 mH
Equipment		terminals 2-, 3
Voltage $U_i$		30 V
Current $I_i$		115 mA
Power $P_i$		1 mW
Voltage $U_o$		2 V
Current $I_o$		8.5 mA
Power $P_o$		1.1 mW
Equipment		terminals 1+, 2 / 3-
Voltage $U_o$		27.2 V
Current $I_o$		115 mA
Power $P_o$		784 mW
Internal capacitance $C_i$		12 nF
Internal inductance $L_i$		0 mH
Output		
Maximum safe voltage	$U_m$	250 V (Attention! The rated voltage can be lower.)
Certificate		CML 17 ATEX 3028X
Marking		Ⓜ II 3G Ex ec IIC T4 Gc
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11:2007, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to IEC/EN 60079-11:2007, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018 , EN 60079-7:2015+A1:2018 , EN 60079-11:2012
<b>International approvals</b>		
UL approval		E106378
Control drawing		116-0439 (cULus)
IECEx approval		
IECEx certificate		IECEx CML 17.0015X
IECEx marking		[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I Ex ec IIC T4 Gc
<b>General information</b>		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Release date: 2021-11-29 Date of issue: 2021-11-29 Filename: 239217\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com


Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

**Assembly**

Front view

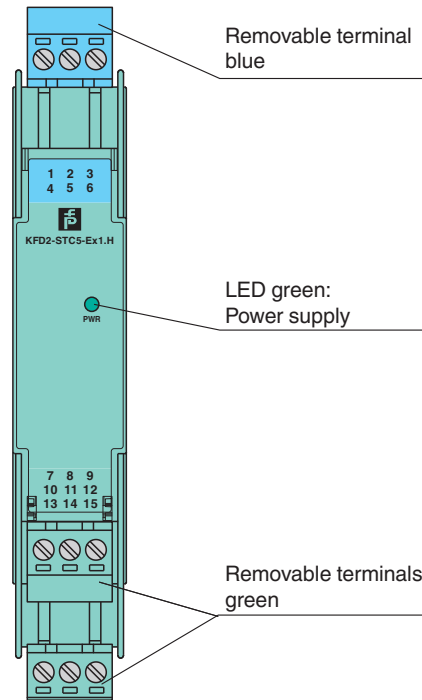

Removable terminal blue

LED green: Power supply

Removable terminals green

**Matching System Components**



	<b>KFD2-EB2</b>	Power Feed Module
	<b>UPR-03</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	<b>UPR-03-M</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	<b>UPR-03-S</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	<b>K-DUCT-BU</b>	Profile rail, wiring comb field side, blue
	<b>K-DUCT-BU-UPR-03</b>	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

**Accessories**

	<b>K-250R</b>	Measuring resistor
	<b>K-500R0%1</b>	Measuring resistor
	<b>KF-ST-5GN</b>	Terminal block for KF modules, 3-pin screw terminal, green
	<b>KF-STP-5GN</b>	Terminal block for KF modules, 3-pin screw terminal, with test sockets, green

Release date: 2021-11-29 Date of issue: 2021-11-29 Filename: 239217\_eng.pdf

**Accessories**

	<p><b>KF-STP-5BU</b></p>	<p>Terminal block for KF modules, 3-pin screw terminal, with test sockets, blue</p>
	<p><b>KF-CP</b></p>	<p>Red coding pins, packaging unit: 20 x 6</p>

Release date: 2021-11-29 Date of issue: 2021-11-29 Filename: 239217\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

## Application

The device supports the following SMART protocols:

- HART
- BRAIN
- Foxboro

## Connection

The device provides an output on the control side terminals. This output can be operated in the current sink operating mode or current source operating mode. Please refer to the following diagram for connection.

